

OSTROLENK, FABER, GERB & SOFFEN, LLP
Attorneys at Law
1180 Avenue of the Americas
New York, New York 10036-8403
(212) 382-0700

Telex
23 6925
Facsimile
(212) 382-0888

Cable
Ostrofaber New York

Express Mail #EL008134476US

Asst. Commissioner for Patents
Washington, DC 20231

OFGS File No. : P/2171-184
Inventor : Masaki KATAYAMA et al
Title : AN AUDIO SYSTEM CONDUCTING DIGITAL SIGNAL PROCESSING, A
CONTROL METHOD THEREOF, A RECORDING MEDIA ON WHICH THE
CONTROL METHOD IS RECORDED
Assignee : Yamaha Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

23 Pages of Specification including Abstract and Claims
19 Numbered Claims Calculated as 19 Claims for Fee Purposes
13 Sheets of Drawing Containing Figures 1 to 13.
X Declaration and Power of Attorney
X Priority is Claimed under 35 U.S.C. §119:
Convention Date June 15, 1999 for Japan Appln. S.N. 11-169000
 Certified Priority Application
 Verified Statement Claiming Small Entity Status under 37 C.F.R. §1.27.
X Assignment
X Return-Addressed Post Card

OFGS Check No. 94844, which includes the fee of \$730.00, calculated as follows:

Basic Filing Fee:	\$ 690.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	
Number of Independent Claims in Excess of 3, times \$78:	
One or More Multiple Dependent Claims: Total \$260.	
Total Filing Fees or	690.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$ 730.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL008134476US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on June 14, 2000:

Dorothy Jenkins
Name of Person Mailing Correspondence

Dorothy Jenkins
Signature
June 14, 2000
Date of Signature

Respectfully submitted,

Max Moskowitz
Max Moskowitz

Registration No.: 30,576
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

AN AUDIO SYSTEM CONDUCTING DIGITAL SIGNAL PROCESSING,
A CONTROL METHOD THEREOF, A RECORDING MEDIA ON
WHICH THE CONTROL METHOD IS RECORDED

5 This application is based on Japanese patent application
Hei-11-169000 filed on June 15, 1999, the entire contents of which are
incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 a) Field of the Invention

 The present invention relates to an audio system, a control method
thereof, and a recording media on which a program of the method is recorded,
and in particular, to an audio system capable of changing an acoustic effect
or a sound effect using a graphical user interface (GUI) and a digital signal
15 processor (DSP), a control method of the audio system, and a recording
media on which a program of the method is recorded.

b) Description of the Related Art

 Fig. 13 shows a block diagram an outline of an amplifier system as an
20 example of a stand-alone audio system of the prior art.

 An external compact disk (CD) player supplies a digital audio signal
or an analog audio signal to a CD player terminal T1. An external tuner
inputs an analog audio signal to a tuner terminal T2. Other audio signals
are fed to a first auxiliary terminal T3 and a second auxiliary terminal T4. An
25 input selector SL is connected to the terminals T1 to T4. The selector SL
includes a digital-to-analog (D/A) converter and an analog-to-digital (A/D)

converter, which are not shown. An analog audio signal is delivered via the selector SL to an audio amplifier section AM. The amplifier section AM conducts a digital signal processing (DSP) for the received signal, amplifies the resultant audio signal, and then outputs the amplified signal to a speaker terminal Ts. The terminal Ts is connected to a loudspeaker, not shown. A central processing unit (CPU) 150 controls the overall operation of the amplifier system AS. A read-only memory (ROM) 151 stores various programs for DSP, data for DSP, various control programs, and control data. A random access memory (RAM) 152 serves as a work area to temporarily store various data items. A display section 153 displays various information items such as a sound source being selected and a DSP mode. An operator panel 154 includes various types of operation keys.

A bus 155 connects the input selector SL, the CPU 150, the ROM 151, the RAM 152, the display 153, and the operator panel 154 to each other.

Operation of the amplifier system will be briefly described.

First, description will be given of a situation in which DSP is not conducted. When a user activates a selection switch, not shown, of the operator panel 154, an operation state of the panel 154 is notified via the bus 155 to the CPU 150. The input selector SL connects under control of the CPU 150 one of the terminals T1 to T4 to the audio amplifier section AM.

An external equipment inputs an analog audio signal or a digital audio signal via the selector SL to the amplifier section AM. The amplifier section AM amplifies the input signal and then outputs the amplified signal to the speaker terminal Ts. The speaker connected to the terminal Ts sounds.

Concurrently, the display section 153 displays information of the selected sound source (e.g., a CD player) or the like.

Next, description will be given of a situation to conduct DSP. When a user operates a selection switch and a DSP mode selection switch, not shown, of the panel 154, an operation state of the panel 154 is notified via the bus 155 to the CPU 150. Under control of the CPU 150, the input
5 selector SL sequentially stores a digital signal obtained by converting an analog audio signal inputted from one of the terminals T1 to T4 or a digital audio signal therefrom in an RAM for DSP, not shown, in the audio amplifier section AM.

The CPU 150 operates as a digital signal processor. Specifically,
10 the CPU 150 reads from the ROM 151 a program corresponding to the selected DSP mode ("HALL", "JAZZ", "ROCK", or "DISCO" mode) and conducts DSP for the digital audio signal stored in the DSP RAM. The amplifier section AM amplifies the analog audio signal resultant from the DSP and then outputs the amplified signal to the speaker terminal Ts. The
15 speaker connected to the terminal Ts produces sound.

The display section 153 displays information of the selected sound source (e.g., a CD player), the selected DSP mode (e.g., "JAZZ"), and the like.

To obtain an acoustic effect corresponding to each DSP mode, a
20 parameter value for each DSP mode is determined for the DSP parameter by the maker or manufacture of the system.

There has also been known an amplifier system having a function for the user to set various DSP parameters to be memorized therein.

However, the user must have technical knowledge to control DSP
25 parameters in the amplifier system of the prior art. That is, a user not familiar with acoustics cannot recognize or perceive by senses what kind of

effect is attained by controlling which one of the DSP parameters.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an audio system in
5 which the user can visually recognize effect of each parameter value of DSP
on the acoustic effect and can easily change the parameter value, a control
method thereof, and a recording media on which the method is recorded.

According to one aspect of the present invention, there is provided an
audio system, comprising: image display for displaying a plurality of types of
10 parameters to determine acoustic characteristics and displaying image data
beforehand set respectively to values of the parameters, corresponding to
values of the parameters; and operator display for displaying, for each of the
parameter types, a parameter operator to indicate a value of a parameter.

According to another aspect of the present invention, there is
15 provided an audio system control method, comprising: an image display step
of displaying a plurality of types of parameters to determine acoustic
characteristics, values of the parameters, and image data beforehand set
respectively to the values of the parameters, corresponding to the values of
the parameters and an operator display step of displaying, for each of the
20 parameter types, a parameter operator to indicate a value of a parameter.

According to another aspect of the present invention, there is
provided a recording media for recording an audio system control program,
wherein the program displays a plurality of types of parameters to determine
acoustic characteristics, values of the parameters, and image data
25 beforehand set respectively to the values of the parameters, corresponding to
the values of the parameters and the program displays, for each of the

parameter types, a parameter operator to indicate a value of a parameter.

As described above, there is provided an audio system in which the user can visually recognize the effect of DSP parameter values on the acoustic effect and can easily change the parameter values, a control method
5 thereof, and a recording media on which the method is recorded.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention will become more apparent from the consideration of the following detailed description taken in
10 conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram showing constitution of an embodiment of an audio system according to the present invention;

Fig. 2 is a front view of a front panel of the embodiment of the audio system;

15 Fig. 3 is a front view showing a rear panel of the embodiment of the audio system;

Figs. 4a, 4a', 4a'', 4b, 4b', 4b'', 4c, 4c', and 4c'' are diagrams showing examples of images displayed on a personal computer (PC) in the embodiment of the audio system;

20 Figs. 5 to 11 are diagrams showing examples of images displayed on a PC of the embodiment of the audio system corresponding to DSP parameter values;

Fig. 12 is a flowchart showing an example of general operation of the embodiment of the audio system; and

25 Fig. 13 is a block diagram showing structure of an audio system of the prior art.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 shows in a general block diagram of an embodiment of an audio system according to the present invention.

The audio system 1 includes a receiver 2 and a personal computer 14.

5 The receiver 2 includes a tuner section, not shown. The personal computer 14 is connected via a USB interface 12 to the receiver 2 to control the receiver 2. If desired, the user can expand the audio system 1 by connecting a mini-disk (MD) player 15 to a first auxiliary terminal 23, which will be described later, and/or a tape deck 16 to a second auxiliary terminal
10 24, which will be described later.

An outline of the construction of the receiver 2 will be described by referring to Fig. 1.

A digital audio signal from a sound card of the personal computer 14 is inputted to a digital audio signal terminal 21. An analog audio signal from
15 a sound card of the computer 14 is fed to an analog audio signal terminal 22. A digital or analog audio signal from an external digital audio (recording) reproducing device such as an MD player is delivered to the first auxiliary terminal 23. An analog audio signal from an external digital audio (recording) reproducing device such as the tape deck 16 is delivered to the
20 second auxiliary terminal 24. The signal connecting terminals 21 to 24 are connected to an input selector 3. An audio signal via USB, i.e., PC-U is inputted via a USB interface 12, which will be described later, to the selector 3. The selector 3 includes a D/A converter and an A/D converter. An audio amplifier 4 conducts digital signal processing for the analog audio signal
25 received via the selector 3, amplifies the audio signal, and outputs the amplified signal to a speaker terminal 5. The terminal 5 is connected to a

speaker. A digital signal processor (DSP) 18 in the audio amplifier 4 executes the digital signal processing (DSP). An RAM 49 in the DSP 18 functions as a work area in the audio amplifier 4 to temporarily store various data items. An operator panel 6 includes various operation keys. A CPU 7 supervises the overall operation of the receiver 2. A display 8 displays various information items such as a sound source being selected and a DSP mode. An ROM 9 stores various programs for DSP, data for DSP, various control programs, and control data. An RAM 10 serves as a work area to temporarily store various data. The USB interface 12 communicates signals via a USB terminal 13 with the personal computer 14. Specifically, the USB interface 12 transfers a control signal received from the computer 14 to a bus 11 and a control signal received from the bus 11 to the computer 14. On receiving an audio signal (PC-U) from the computer 14, the USB interface 12 sends the signal to the input selector 3.

The bus 11 connects the input selector 3, the audio amplifier 4, the operator panel 6, the CPU 7, the display 8, the ROM 9, the RAM 10, and the USB interface 12 to each other.

The ROM 9 stores a program for the personal computer 14 to control the receiver 2.

DPS parameter values set by the user can be freely registered to an area in the RAM 10. The parameter values registered are saved for a period by a memory backup system including batteries.

The personal computer 14 controls the DSP mode change in the receiver 2. Moreover, the computer 14 changes each value of various types of parameters for each DSP mode, and each parameter values in the work area of the RAM 10.

The personal computer 14 displays image data corresponding to a value inputted for each DSP parameter. The user can visually recognize an acoustic effect corresponding to each DSP mode.

A program and graphic data to construct a GUI screen, which will be described later, are supplied to the personal computer 14 via a recording media such as a CD-ROM.

Referring next to display examples shown in Figs. 4a to 4c", description will be given in detail of image data corresponding to a value inputted for each DSP parameter above.

10 Description will be given of a case in which the DSP parameter is "Initial Delay". The "Initial Delay" parameter indicates, when a sound is produced, an interval of time between a first peak of sound pressure observed at a sound receiving point and a second peak thereof. Setting a longer interval between the first and second peaks indicates that the sound producer is further from the sound receiving point. Setting a shorter interval
15 between the first and second peaks means that the sound producer is nearer to the sound receiving point.

When a standard value is set to "Initial Delay" parameter, an image of the sound producer (e.g., a piano or the like) is displayed in a standard size as shown in Fig. 4a'. When a value larger than the standard value is set to the "Initial Delay" parameter, the image of the sound producer is displayed in a size smaller than the standard size as shown in Fig. 4a. When a value smaller than the standard value is set to the "Initial Delay" parameter, the image of the sound producer is displayed in a size greater than the standard
25 size as shown in Fig. 4a".

The image of the sound producer changes in size by altering the

"Initial Delay" parameter as above. The user consequently can visually recognize effect of the change of the parameter value.

Description will next be given of a case in which the DSP parameter is "Effect Trim". The "Effect Trim" parameter is a parameter to adjust an overall level of acoustic or sound effect. Setting the "Effect Trim" parameter to a smaller value lowers the overall level of acoustic effect. Setting the "Effect Trim" parameter to a greater value increases the overall level of acoustic effect.

When a standard value is set to "Effect Trim" parameter, a shade of an object (e.g., a wall or a ceiling of a room) around an image of the sound producer is displayed in standard degradation or thickness/thinness as shown in Fig. 4b'. When a value less than the standard value is set to the "Effect Trim" parameter, the color becomes thinner, namely, is displayed in lower gradation. When a value more than the standard value is set to the "Effect Trim" parameter, the color becomes thicker and is displayed in higher gradation.

As above, the shade of the object around the image of the sound producer changes in gradation by altering the "Effect Trim" parameter value. The user hence can visually perceive effect of the change of the "Effect Trim" parameter value.

Next, description will be given of a case in which the DSP parameter is "Room Size". The "Room Size" parameter is a parameter to set size of the listening room. Setting the "Room Size" parameter to a smaller value minimizes the space of the listening room. Setting the "Room Size" parameter to a greater value enlarges the room space.

When a standard value is set to the "Room Size" parameter, the

space (for example, of a room) of the image is displayed in a standard size as shown in Fig. 4c'. When a value less than the standard value is set to the "Room Size" parameter, the space displayed is smaller than the standard space as shown in Fig. 4c". When a value more than the standard value is set to the "Room Size" parameter, the space displayed is larger than the standard space as shown in Fig. 4c.

As above, the space displayed as the image changes in size by altering the "Room Size" parameter value. Therefore, the user can visually recognize effect of the change of the "Room Size" parameter value.

Fig. 2 shows a front view of a front panel of the receiver 2.

The front panel of the receiver 2 includes a plurality of switches partly constituting the operation panel 6.

Selector switches 6a1 to 6a4 select a sound source. A DSP switch 6b indicates whether or not the DSP is operated. A preset switch 6c, which can be set to on exclusively with respect to the DSP switch 6b, indicates whether or not preset station selection is desired to function when the tuner section is in use. When the DSP switch 6b is on, a pair of up/down switches 6d and 6e function as a DSP mode selection switch. When the preset switch 6c is on, the switches 6d and 6e function as a station selection switch. A volume control 6f adjusts magnitude of sound volume. A power switch 6g turns power on/off.

The front panel of the receiver 2 includes a headphone jack 5p to connect a headphone.

The front panel of receiver 2 further includes display sections each constituting a part of the display 8.

A multifunctional display section 8d, which includes a dot-matrix

transmission liquid crystal display (LCD) with a backlight or a fluorescent luminescence (FL) display element, displays various information. When the sound source currently selected is a sound card of the personal computer 14 connected to the system via the digital audio terminal 21 or the analog audio terminal 22, a first indicator 8i1 turns on. When the current sound source is an external audio (recording) reproducing device connected to the system via the first auxiliary terminal 23, a second indicator 8i2 turns on. When the current sound source is an external audio (recording) reproducing device connected to the system via the second auxiliary terminal 24, a third indicator 8i3 turns on. When the current sound source is an internal tuner, a fourth indicator 8i4 turns on. When the receiver 2 is powered, a power indicator 8p turns on.

Fig. 3 shows a front view of a rear panel of the receiver 2. Arranged on the rear panel are the speaker terminal 5, the digital audio terminal 21, the analog audio terminal 22, and the first and second auxiliary terminal 23 and 24 described above. The first auxiliary terminal 23 includes a digital audio auxiliary terminal 23₁ to receive a digital audio signal from an external digital (recording) reproducing device and an analog audio auxiliary terminal 23₂ to receive an analog audio signal from an external digital (recording) reproducing device. The rear panel further includes a USB terminal 13, antenna terminals (an FM antenna terminal, an AM antenna terminal, and a ground terminal), an analog audio output terminal, and a subwoofer output terminal.

Referring now to Figs. 5 to 11, description will be given of a specific example of operation for the personal computer 14 to change DSP parameter values.

Fig. 5 shows an example of a DSP setting screen image displayed when the DSP parameters are set to the standard values.

The DSP setting screen image includes a DSP parameter area 51 to display names of the DSP parameters, a parameter operator area 52 to set DSP parameter values in three stages, and an image picture 50 which changes according to the parameter setting values.

Fig. 6 shows a DSP setting screen displayed when the "Initial Display" parameter is set to a value less than the standard value.

The image picture 60 in Fig. 6 differs in size of the sound producer, i.e., a piano, from the image picture 50 displayed with the standard parameter value (Fig. 5).

Specifically, the piano 60a in the image picture 60 is larger than the piano 50a in the image picture 50.

Consequently, the user can visually recognize that effect obtained when the value set to the "Initial Delay" parameter is less than the standard value is substantially the same as effect attained when the distance between the listener and the piano as the sound source is reduced.

Fig. 7 shows a DSP setting screen image displayed when the "Initial Display" parameter is set to a value more than the standard value. In Fig. 7, the piano 70a in the image picture 70 is smaller in size than the piano 50a in the image picture 50.

Therefore, the user can visually recognize effect of the parameter. When the value set to the "Initial Delay" parameter is more than the standard value, the effect obtained is almost the same as effect attained when the distance between the listener and the piano is increased.

Fig. 8 shows a DSP setting screen image displayed when the "Effect

Trim" parameter is set to a value less than the standard value.

The image picture 80 in Fig. 8 and the image picture 50 displayed with the standard parameter value (Fig. 5) differ from each other in gradation or thickness/thinness of the shade of walls of the room.

5 Concretely, the shade of walls 80b in the image picture 80 is thinner than that of walls 50a in the image picture 50.

In consequence, the user can visually recognize that when the value set to the "Effect Trim" parameter is less than the standard value, a total level of acoustic or sound effect is decreased.

10 Fig. 9 shows a DSP setting screen image displayed when the "Effect Trim" parameter is set to a value more than the standard value. In Fig. 9, the shade of walls 90b of the room in the image picture 90 is thicker than that of the walls 50a in the image picture 50.

Therefore, the user can visually recognize that when the value set to
15 the "Effect Trim" parameter is more than the standard value, the total level of acoustic or sound effect is increased.

Fig. 10 shows a DSP setting screen image displayed when the "Room Size" parameter is set to a value less than the standard value.

The image picture 100 in Fig. 10 differs in size of space of the room
20 from the image picture 50 displayed with the standard parameter value (Fig. 5).

Specifically, the space 100c of the room in the image picture 100 is smaller than the space 50c of the room in the image picture 50.

Consequently, the user can visually recognize effect obtained when
25 the value set to the "Room Size" parameter is less than the standard value.

Namely, the effect attained is substantially the same as effect obtained when

the space of the room of the listener becomes smaller.

Fig. 11 shows a DSP setting screen image displayed when the "Room Size" parameter is set to a value more than the standard value. In Fig. 11, the space 100c of the room in the image picture 110 is larger than the space
5 50c of the room in the image picture 50.

Resultantly, the user can visually recognize that effect obtained when the value set to the "Room Size" parameter is more than the standard value is almost the same as effect attained when the space of the room of the listener becomes greater.

10 Referring next to Fig. 12, description will be given of an example of general operation of the personal computer 14 to set DSP parameters. In this description, the DSP setting screens shown in Figs. 5 and 6 will be referenced when necessary.

First, the personal computer 14 is powered to start its operation, and
15 then the computer 14 starts application software to set DSP parameters (step S1).

The software displays, for example, the DSP setting screen image on a display of the computer 14 (step S2).

The user selects in the screen a value of a DSP parameter to be
20 changed (step S3).

In response to the selection of the parameter value, the software changes the image picture displayed on the DSP setting screen (step S4).

Specifically, when the user selects, for example, "-" to set a value less than the standard value, from the parameter operators corresponding to the
25 "Initial Delay" parameter shown in Fig. 5, the software changes the image picture 50 into the image picture 60 of Fig. 6.

The user can therefore visually recognize that effect obtained when the value set to the "Initial Delay" parameter is less than the standard value is almost the same as effect attained when the listener is nearer to the piano as the sound source.

- 5 When parameter values are changed as above, the value of each parameter after the change is transferred via the USB terminal 13 to the receiver 2 of the audio system 1 (step S5).

The receiver 2 stores the values of parameters after the change in a work area of the RAM 10. The acoustic processing is thereafter executed
10 according to the values of DSP parameters changed.

In the embodiment above, when the user selects a desired setting value from the parameter operators of the DSP parameters displayed on the DSP setting screen, an image associated with each parameter type is changed according to the setting value selected. Therefore, the user can
15 visually perceive an acoustic characteristic influenced by the change of the parameter value. This means that even a user not familiar with technical knowledge of DSP parameters can easily enjoy the acoustic effect.

The DSP setting screen of the embodiment displays three types of parameters, i.e., "Effect Trim", "Room Size", and "Initial Display". However,
20 the parameters to be changed in the DSP setting screen are not limited to the three types of parameters. Namely, other DSP parameters can also be treated in a similar fashion.

In the DSP setting screen of the embodiment, three stages are prepared for the setting values of each parameter. However, the number of
25 setting stages is not limited to three. That is, more than three stages may be employed, and the values may be continuously set, for example, by a slide

bar.

When the value of "Effect Trim" parameter is changed in the DSP setting screen of the embodiment, the gradation or thickness/thinness of the shade of walls and/or the ceiling of the room is changed in the image picture
5 so that the viewer images effect of the change in the value "Effect Trim" parameter. In place of gradation of the shade, patterns painted on walls and/or the ceiling of the room may be changed in the image picture for the viewer to image effect of the change in the value "Effect Trim" parameter.

While the present invention has been described with reference to the
10 particular illustrative embodiments, it is not to be restricted by those embodiments but only by the appended claims. It is to be appreciated that those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present invention.

WHAT IS CLAIMED IS:

1. An audio system, comprising:

image display for displaying a plurality of types of parameters to
determine acoustic characteristics and displaying image data beforehand set
5 respectively to values of the parameters, corresponding to values of the
parameters; and

operator display for displaying, for each of the parameter types, a
parameter operator to indicate a value of a parameter.

10 2. An audio system according to claim 1, wherein the image display
reads out image data corresponding to the value of the parameter indicated
by the parameter operator and displays an image according to the image
data.

15 3. An audio system according to claim 1, wherein:

the parameter operator indicates a value of a room characteristic
parameter to determine an acoustic characteristic obtained by a size of a
listening room; and

the image display displays image data in which the size of the room is
20 imaged corresponding to the value indicated for the room characteristic
parameter.

4. An audio system according to claim 1, wherein:

the parameter operator indicates a value of a distance characteristic
25 parameter to determine an acoustic characteristic obtained by a distance
between a listener and a sound source; and

the image display displays image data in which the distance is imaged corresponding to the value indicated for the distance characteristic parameter.

- 5 5. An audio system according to claim 1, wherein:
the parameter operator indicates, when assigning an effect to sound, a value of an effect quantity characteristic parameter to determine an acoustic characteristic obtained by a magnitude of the effect to be assigned; and

10 the image display displays image data in which the magnitude of the effect assigned to sound is imaged corresponding to the value indicated for the effect quantity characteristic parameter.

6. An audio system according to claim 5, wherein the image display
15 stores a shade corresponding to each value of the effect quantity characteristic parameter and sets the shade of the image data to a shade corresponding to the value indicated for the effect quantity characteristic parameter.

- 20 7. An audio system according to claim 1, wherein the image display and the operator display include an information processing terminal including a display.

8. An audio system control method, comprising:
25 an image display step of displaying a plurality of types of parameters to determine acoustic characteristics, values of the parameters, and image

data beforehand set respectively to the values of the parameters,
corresponding to the values of the parameters and

an operator display step of displaying, for each of the parameter types,
a parameter operator to indicate a value of a parameter.

5

9. An audio system control method according to claim 8, wherein the
image display step includes

reading out image data corresponding to the value of the parameter
indicated by the parameter operator and

10 displaying an image according to the image data.

10. An audio system control method according to claim 8, wherein:

the parameter operator displayed at the operator display step
indicates a value of a room characteristic parameter to determine an acoustic
15 characteristic concerning a size of a listening room; and

the image display step displays image data in which the size of the
room is imaged corresponding to the value of the room characteristic
parameter.

20 11. An audio system control method according to claim 8, wherein:

the parameter operator displayed at the operator display step
indicates a value of a distance characteristic parameter to determine an
acoustic characteristic concerning a distance between a listener and a sound
source; and

25 the image display step displays image data in which the distance is
imaged corresponding to the value of the distance characteristic parameter.

12. An audio system control method according to claim 8, wherein:
the parameter operator displayed at the operator display step
indicates, when assigning an effect to sound, a value of an effect quantity
characteristic parameter to determine an acoustic characteristic concerning a
5 magnitude of the effect to be assigned; and

the image display step displays image data in which the magnitude of
the effect assigned to sound is imaged corresponding to the value of the
effect quantity characteristic parameter.

10 13. An audio system control method according to claim 12, wherein the
image display step sets the shade of the image data to a shade
corresponding to the value indicated for the effect quantity characteristic
parameter.

15 14. A recording media for recording an audio system control program,
wherein
the program displays a plurality of types of parameters to determine
acoustic characteristics, values of the parameters, and image data
beforehand set respectively to the values of the parameters, corresponding to
20 the values of the parameters and

the program displays, for each of the parameter types, a parameter
operator to indicate a value of a parameter.

15. A recording media for recording an audio system control program
25 according to claim 14, wherein
when displaying the image, the control program reads out image data

corresponding to the value of the parameter indicated by the parameter operator and displays an image according to the image data.

16. A recording media for recording an audio system control program

5 according to claim 14, wherein

the parameter operator indicates a value of a room characteristic parameter to determine an acoustic characteristic obtained by a size of a listening room; and

when displaying the image, the program displays image data in which
10 the size of the room is imaged corresponding to the value indicated for the room characteristic parameter.

17. A recording media for recording an audio system control program according to claim 14, wherein

15 the parameter operator indicates a value of a distance characteristic parameter to determine an acoustic characteristic obtained by a distance between a listener and a sound source; and

when displaying the image, the control program displays image data in which the distance is imaged corresponding to the value indicated for the
20 distance characteristic parameter.

18. A recording media for recording an audio system control program according to claim 14, wherein

the parameter operator indicates, when assigning an effect to sound,
25 a value of an effect quantity characteristic parameter to determine an acoustic characteristic obtained by a magnitude of the effect to be assigned;

and

when displaying the image, the control program displays image data
in which the magnitude of the effect assigned to sound is imaged
corresponding to the value indicated for the effect quantity characteristic

5 parameter.

19. A recording media for recording an audio system control program
according to claim 18, wherein

when displaying the image, the control program sets the shade of the
10 image data to a shade corresponding to the value indicated for the effect
quantity characteristic parameter.

ABSTRACT OF THE DISCLOSURE

To change a value of a DSP parameter in a DSP setting screen, a user selects from parameter operators a parameter value to be changed. In an image picture displayed on the DSP setting screen, a size, a color, and
5 the like corresponding to substance of the pertinent parameter are changed according to the value of the parameter. The user can visually perceive effect of the value of each DSP parameter on an acoustic effect and can easily change the value of each DSP parameter.

FIG.1

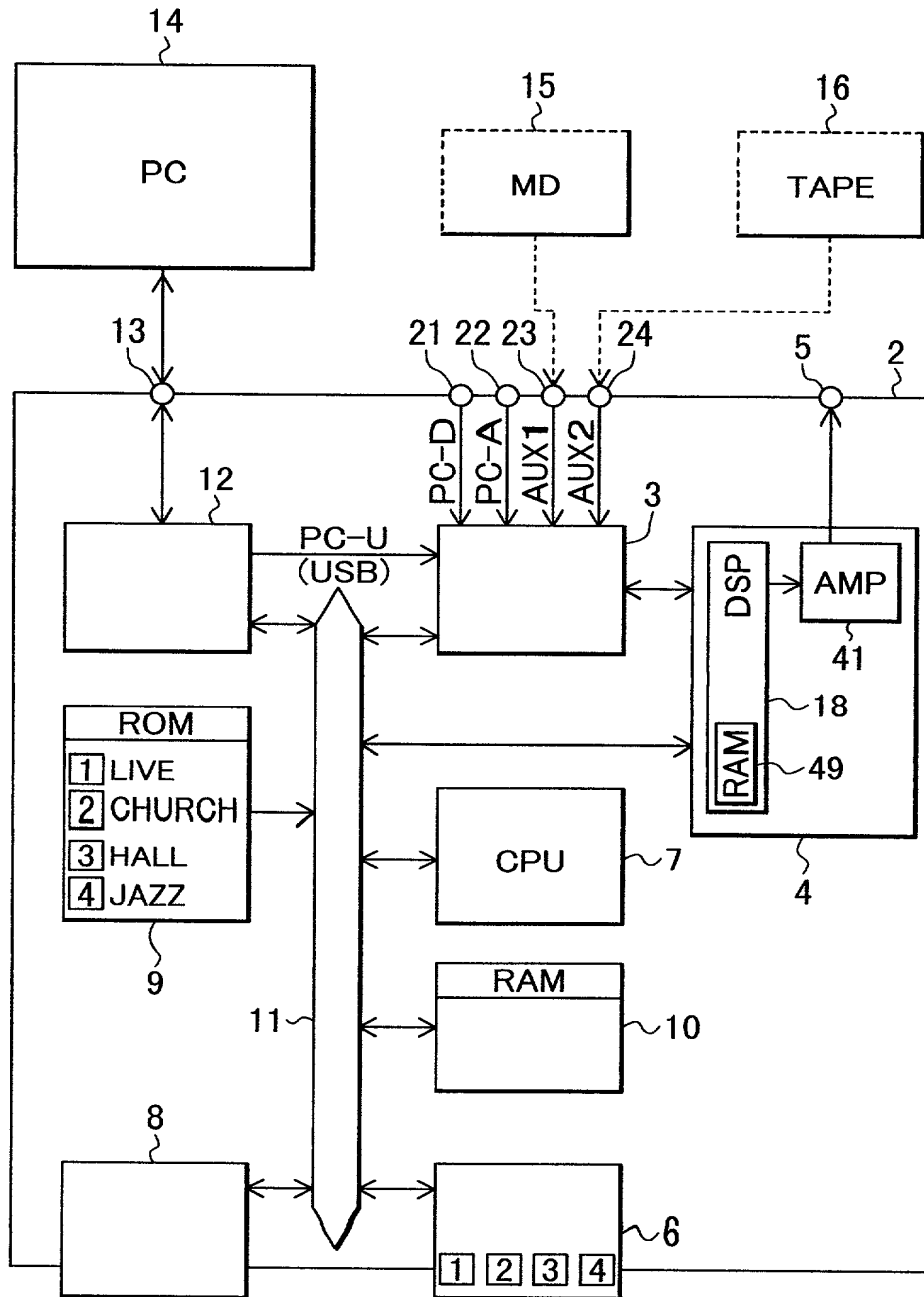


FIG.2

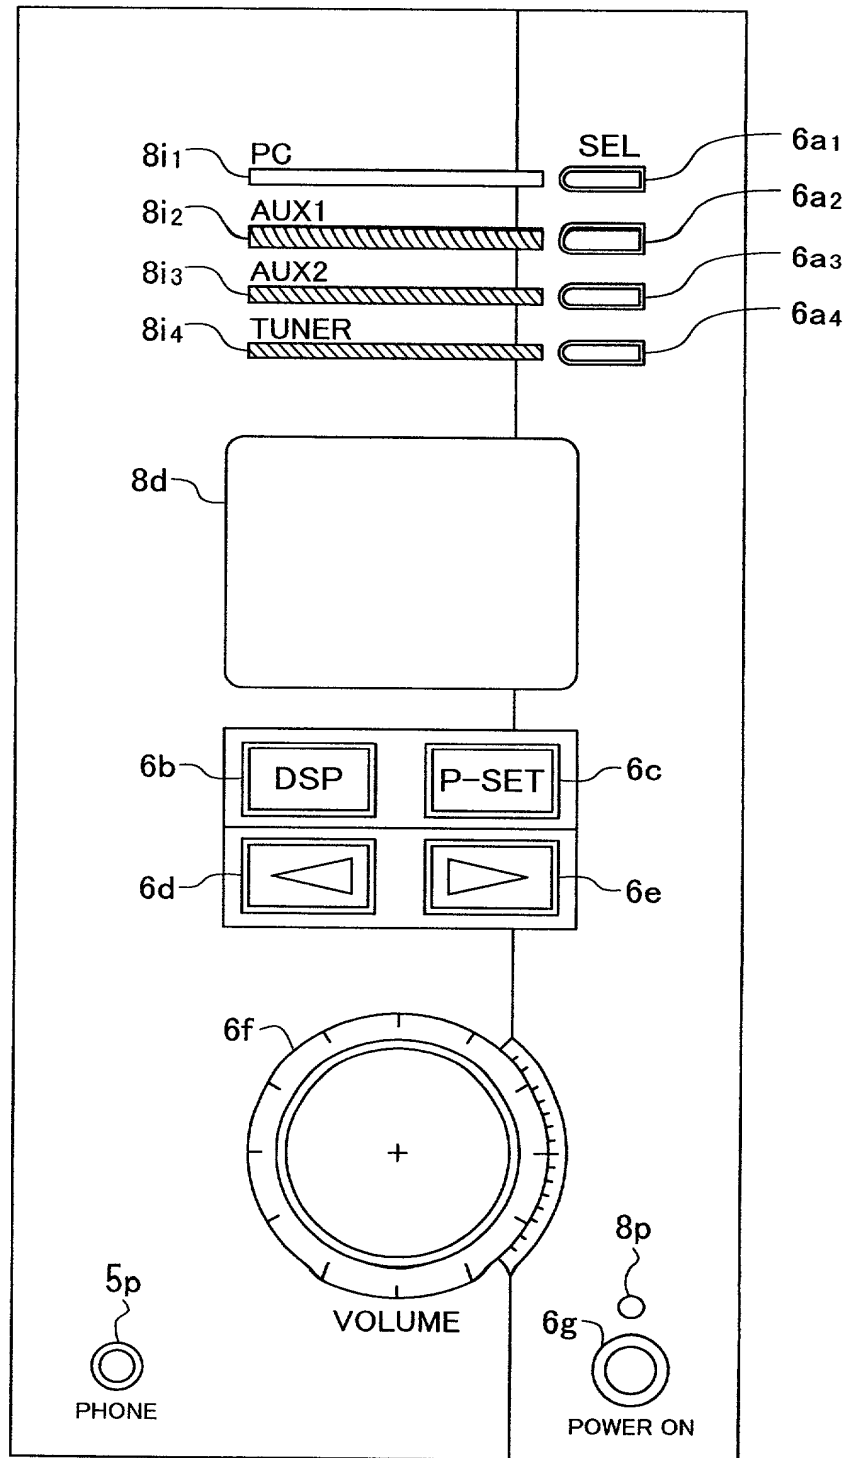


FIG.3

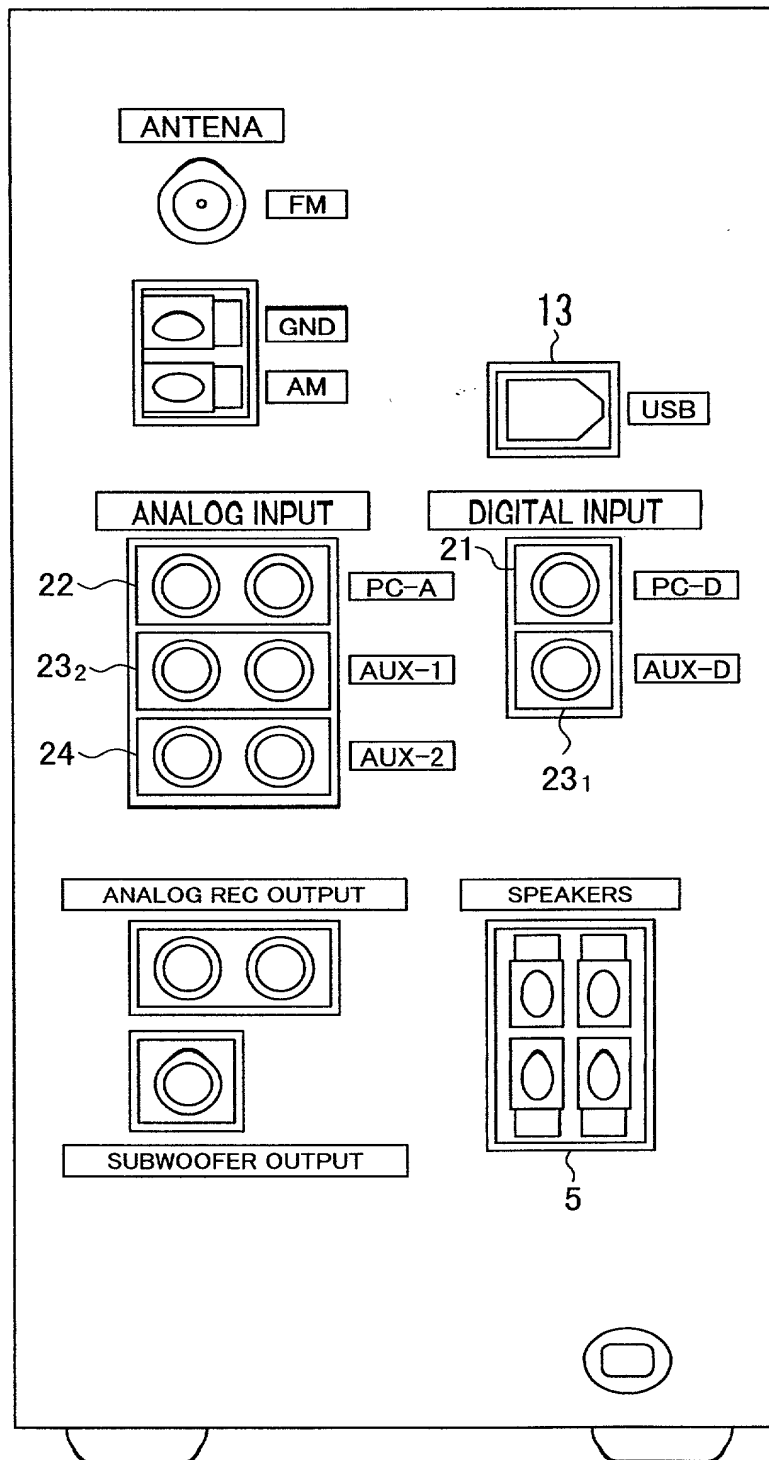


FIG.4a




FIG.4a'




FIG.4a''




FIG.4b




FIG.4b'




FIG.4b''




FIG.4c




FIG.4c'




FIG.4c''




FIG.5

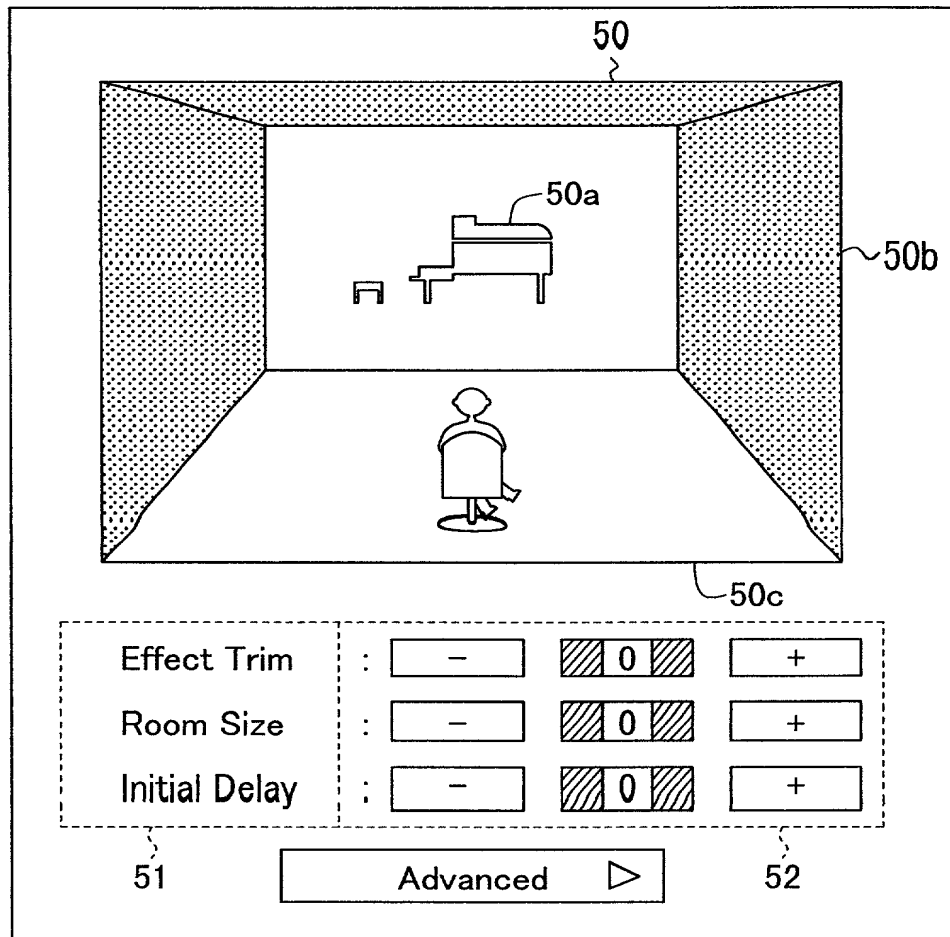


FIG.6

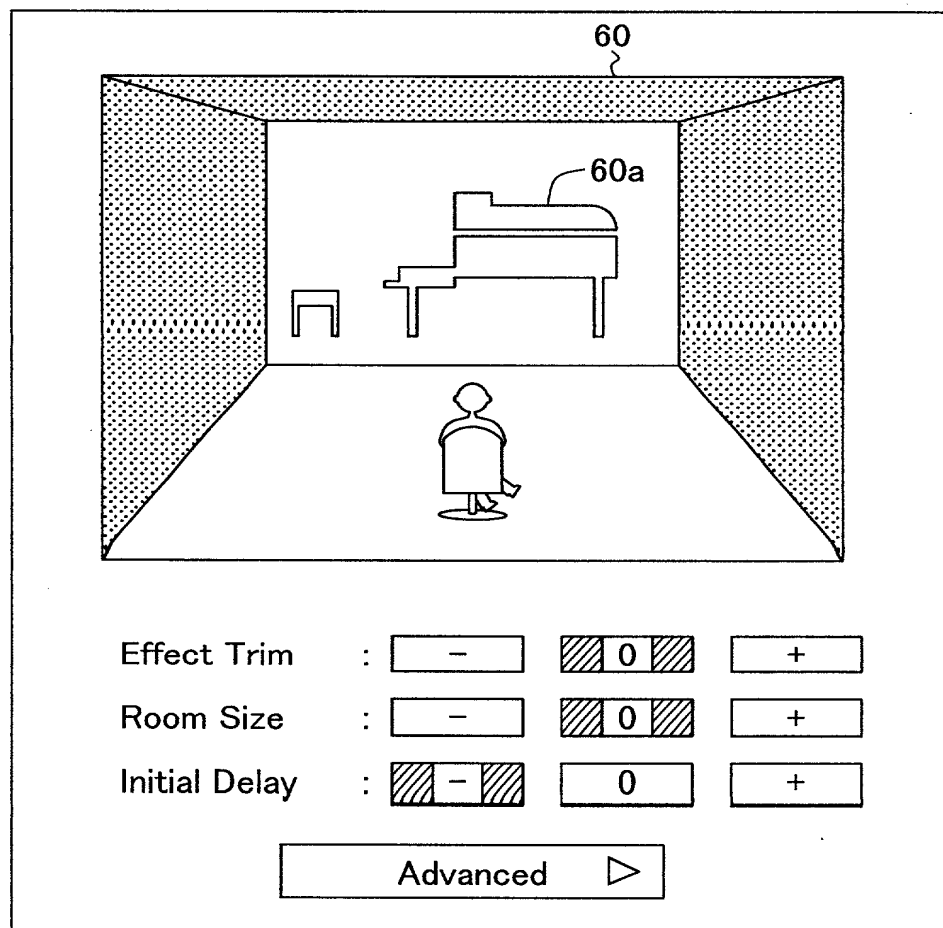


FIG.7

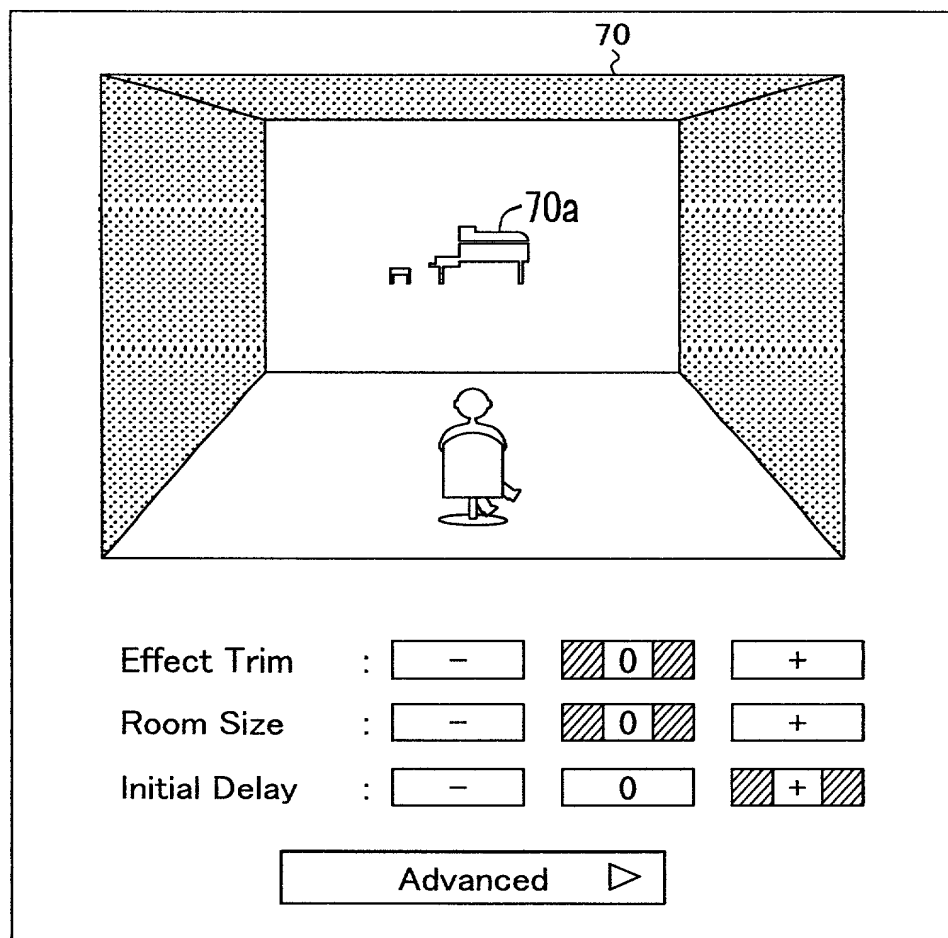


FIG.8

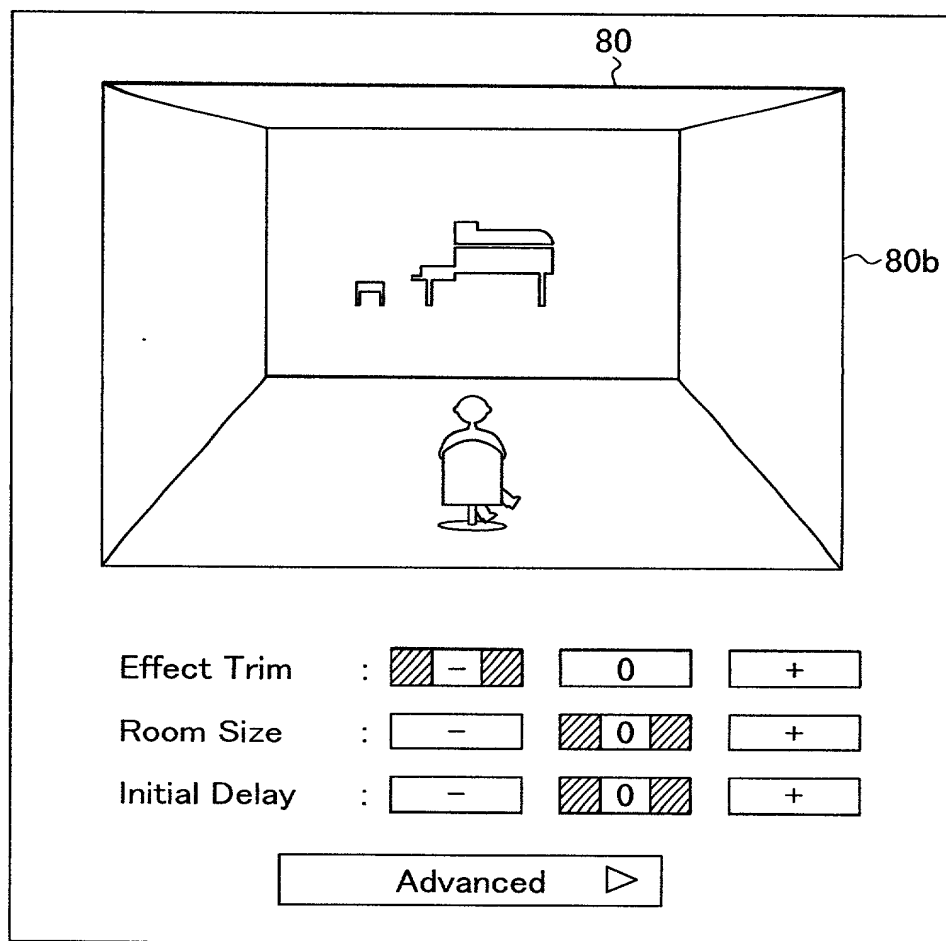


FIG.9

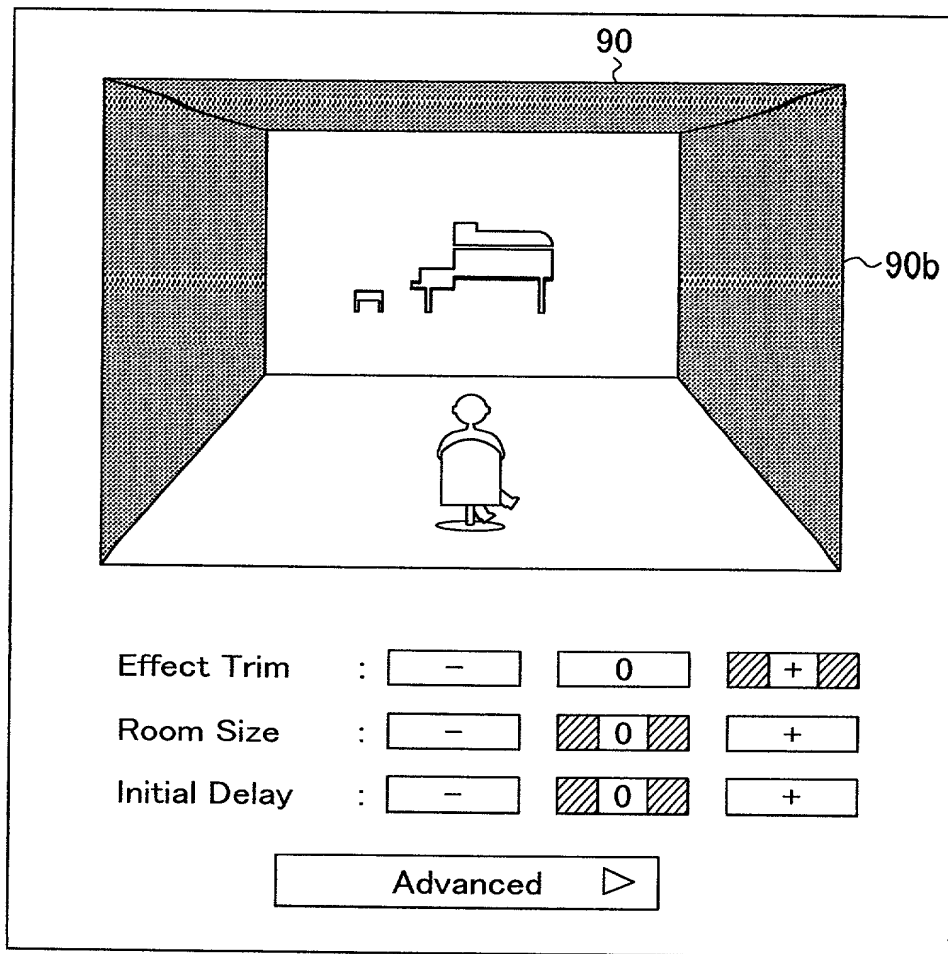


FIG.10

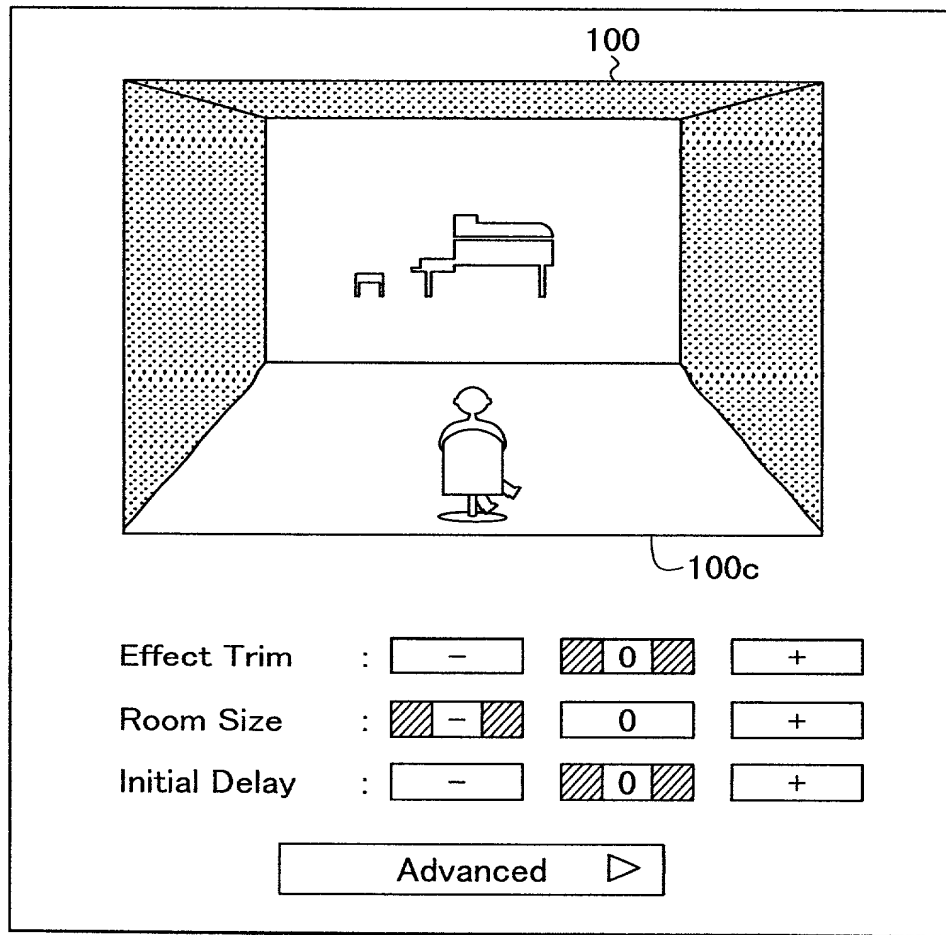


FIG.11

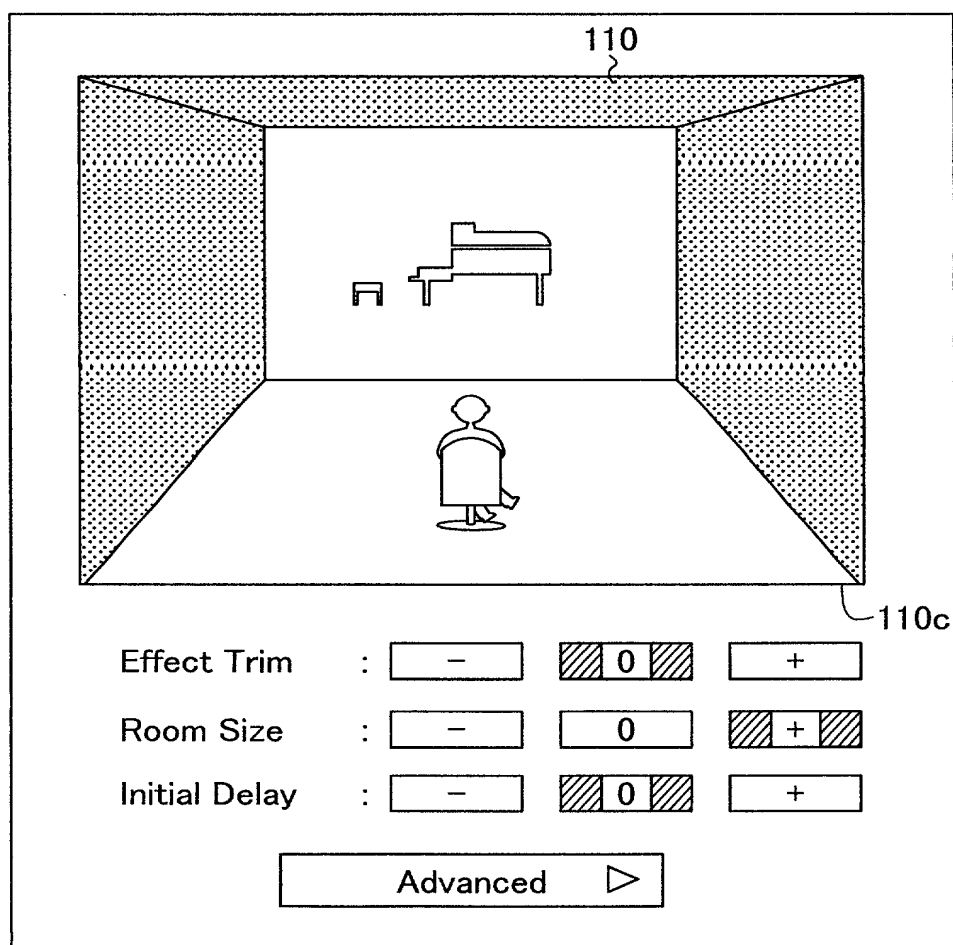


FIG.12


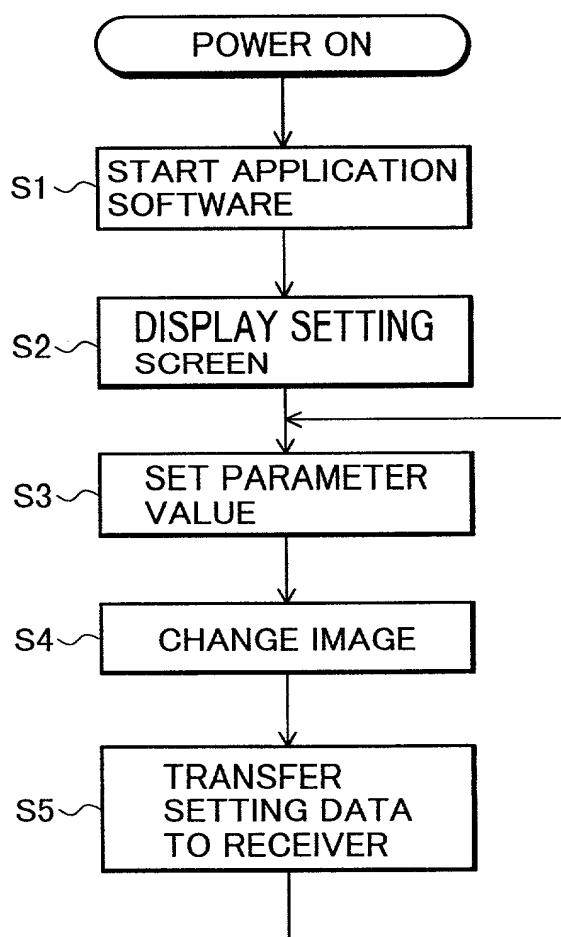


FIG.13
PRIOR ART

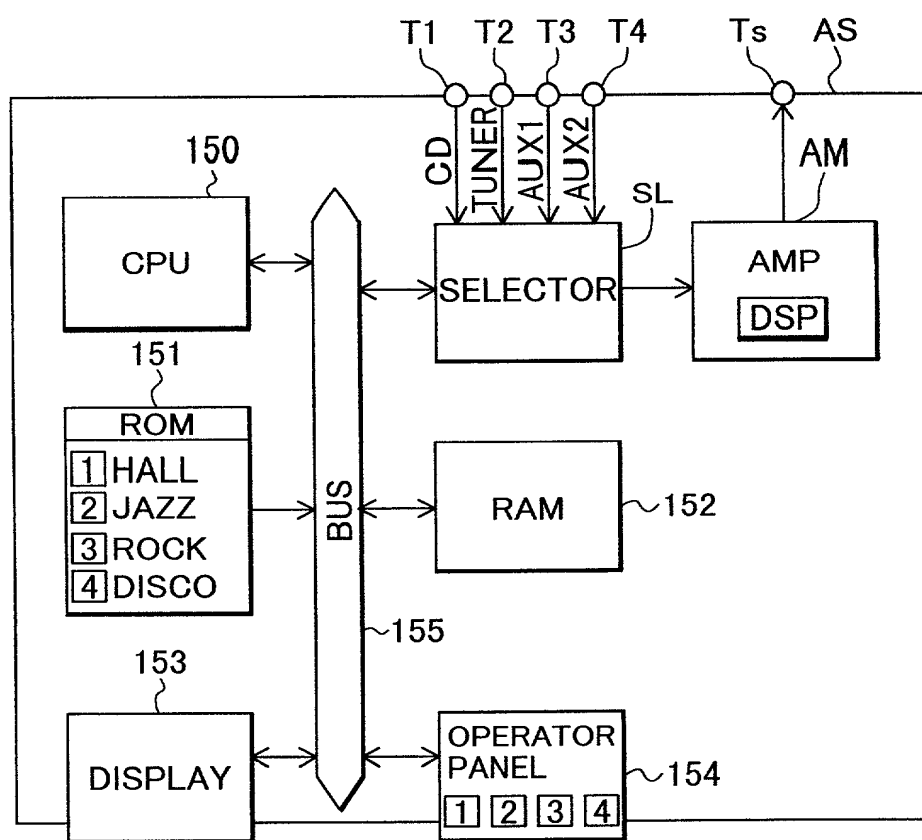

UNITED STATES OF AMERICA COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		OFFICE FILE NO. P/2171-184																																																							
<p>As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p><u>AN AUDIO SYSTEM CONDUCTING DIGITAL SIGNAL PROCESSING, A CONTROL METHOD THEREOF, A RECORDING MEDIA ON WHICH THE CONTROL METHOD IS RECORDED</u></p> <p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent Number _____ and was amended on _____ (if any).</p> <p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p> <p>Prior Foreign or Provisional Application(s)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">COUNTRY</th> <th style="width: 35%;">APPLICATION NUMBER</th> <th style="width: 20%;">DATE OF FILING <small>(day, month, year)</small></th> <th style="width: 20%;">PRIORITY CLAIMED UNDER 35 U.S.C. 119</th> </tr> </thead> <tbody> <tr> <td>Japan</td> <td>Hei 11-169000</td> <td>15/06/99</td> <td>YES <input checked="" type="checkbox"/> NO <input type="checkbox"/></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES <input type="checkbox"/> NO <input type="checkbox"/></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>YES <input type="checkbox"/> NO <input type="checkbox"/></td> </tr> </tbody> </table> <p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 40%;">UNITED STATES APPLICATION NUMBER</th> <th style="width: 30%;">DATE OF FILING <small>(day, month, year)</small></th> <th style="width: 30%;">STATUS <small>(patented, pending, abandoned)</small></th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table> <p>I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.</p> <p>SEND CORRESPONDENCE TO: OSTROLENK, FABER, GERB & SOFFEN 1180 AVENUE OF THE AMERICAS NEW YORK, NEW YORK 10036-8403</p> <p>DIRECT TELEPHONE CALLS TO: (212) 382-0700</p> <p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 40%;">FULL NAME OF SOLE OR FIRST INVENTOR MASAKI KATAYAMA</td> <td style="width: 40%;">INVENTOR'S SIGNATURE <i>Masaki Katayama</i></td> <td style="width: 20%;">DATE 2000.5.22</td> </tr> <tr> <td colspan="2">RESIDENCE Hamamatsu-shi, Shizuoka, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan</td> </tr> <tr> <td>FULL NAME OF SECOND JOINT INVENTOR (IF ANY) YASUHIRO FUJIMURA</td> <td>INVENTOR'S SIGNATURE <i>Yasuhiro Fujimura</i></td> <td>DATE 2000.5.22</td> </tr> <tr> <td colspan="2">RESIDENCE Hamamatsu-shi, Shizuoka, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan</td> </tr> <tr> <td>FULL NAME OF THIRD JOINT INVENTOR (IF ANY) TETSUYA MATSUYAMA</td> <td>INVENTOR'S SIGNATURE <i>Tetsuya Matsuyama</i></td> <td>DATE 2000.5.22</td> </tr> <tr> <td colspan="2">RESIDENCE Hamamatsu-shi, Shizuoka, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan</td> </tr> </table>			COUNTRY	APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	PRIORITY CLAIMED UNDER 35 U.S.C. 119	Japan	Hei 11-169000	15/06/99	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>				YES <input type="checkbox"/> NO <input type="checkbox"/>				YES <input type="checkbox"/> NO <input type="checkbox"/>	UNITED STATES APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	STATUS <small>(patented, pending, abandoned)</small>										FULL NAME OF SOLE OR FIRST INVENTOR MASAKI KATAYAMA	INVENTOR'S SIGNATURE <i>Masaki Katayama</i>	DATE 2000.5.22	RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan			FULL NAME OF SECOND JOINT INVENTOR (IF ANY) YASUHIRO FUJIMURA	INVENTOR'S SIGNATURE <i>Yasuhiro Fujimura</i>	DATE 2000.5.22	RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan			FULL NAME OF THIRD JOINT INVENTOR (IF ANY) TETSUYA MATSUYAMA	INVENTOR'S SIGNATURE <i>Tetsuya Matsuyama</i>	DATE 2000.5.22	RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan		
COUNTRY	APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	PRIORITY CLAIMED UNDER 35 U.S.C. 119																																																						
Japan	Hei 11-169000	15/06/99	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>																																																						
			YES <input type="checkbox"/> NO <input type="checkbox"/>																																																						
			YES <input type="checkbox"/> NO <input type="checkbox"/>																																																						
UNITED STATES APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	STATUS <small>(patented, pending, abandoned)</small>																																																							
FULL NAME OF SOLE OR FIRST INVENTOR MASAKI KATAYAMA	INVENTOR'S SIGNATURE <i>Masaki Katayama</i>	DATE 2000.5.22																																																							
RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan																																																									
FULL NAME OF SECOND JOINT INVENTOR (IF ANY) YASUHIRO FUJIMURA	INVENTOR'S SIGNATURE <i>Yasuhiro Fujimura</i>	DATE 2000.5.22																																																							
RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan																																																									
FULL NAME OF THIRD JOINT INVENTOR (IF ANY) TETSUYA MATSUYAMA	INVENTOR'S SIGNATURE <i>Tetsuya Matsuyama</i>	DATE 2000.5.22																																																							
RESIDENCE Hamamatsu-shi, Shizuoka, Japan		COUNTRY OF CITIZENSHIP Japan																																																							
POST OFFICE ADDRESS c/o YAMAHA CORPORATION 10-1, Nakazawa-cho, Hamamatsu-shi, Shizuoka, Japan																																																									